

MG 10/200

Door Profile
Standard Profiles




MG 14/200


Door Profile
Standard Profiles



DOOR PROFILE MG-10/200

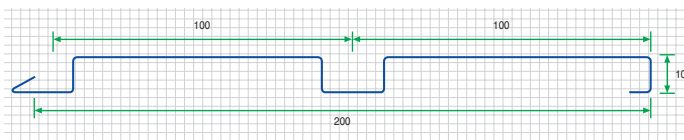

DOOR PROFILE MG-14/200

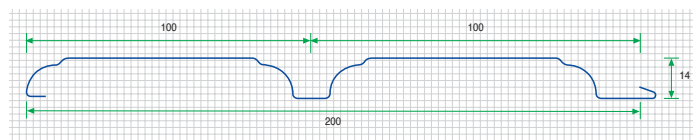

measurements in mm.

TECHNICAL FEATURES

MG-14/200 and MG-10/200 profiles have a distance between troughs (ridge width) of 100 mm and a usable width of 200 mm. These profiles are manufactured to order in various lengths and in thicknesses that range from 0.6 mm to 0.8 mm.

FINISHES

These profiles come in different standard finishes such as galvanized, prepainted (silicone polyester), cold rolled and imitation wood, and to order in: aluzinc, aluminium, stainless steel and copper. They can also be supplied on request with a perforated finish.

APPLICATIONS

Also known as a door-slat profile, this profile has numerous applications, among them the manufacture of: doors, false roofs, sidewalls and eaves, shutters and fencing. These profiles are characterised by high performance, strength and ease of assembly. We also provide a patented assembly system which allows all screws to remain hidden, achieving a unique look for both vertical and horizontal mountings.

